




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H02H 9/04, H04B 15/00</b>		A1	(11) International Publication Number: <b>WO 98/54813</b>
			(43) International Publication Date: 3 December 1998 (03.12.98)
(21) International Application Number: PCT/AU98/00405 (22) International Filing Date: 29 May 1998 (29.05.98) (30) Priority Data: PO 7116                      30 May 1997 (30.05.97)                      AU (71) Applicant (for all designated States except US): AUS- TRALIAN PROTECTIVE ELECTRONICS PTY LTD [AU/AU]; 5 Neil Street, Osborne Park, W.A. 6017 (AU). (72) Inventors; and (75) Inventors/Applicants (for US only): AUSMUS, Nile [AU/AU]; 9 Cape Court, Sorrento, W.A. 6020 (AU). NELISSEN, Willy [AU/AU]; Unit 3, Chich Place, Cannington, W.A. 6107 (AU). (74) Agents: HARWOOD, Errol, John et al.; Wray & Associates, 239 Adelaide Terrace, Perth, W.A. 6000 (AU).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  Published With international search report.	

(54) Title: FILTER FOR A PAIR OF DATA COMMUNICATION LINES

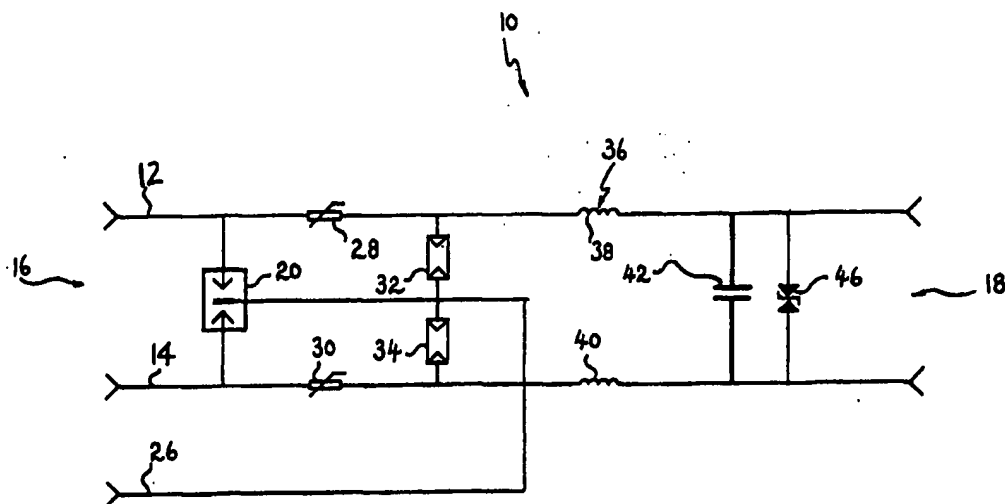

## (57) Abstract

A filter (10) for a pair of data communication lines (12, 14), said filter (10) having an input (16) for connection to said data communication lines (12, 14) and an output (18) for connection to a communication device such as a modem or facsimile machine, the filter (10) comprising: a gas arrester (20) arranged to absorb voltage transients from said data communication lines (12, 14) provided adjacent the input (16); PTC resistors (28, 30) in series in each data communication line (12, 14) after said first suppression means (20); varistors (32, 34) provided after the PTC resistors (28, 30); an RF filter (36) after the varistors; and transient suppression diodes (46) provided after the RF filter (36).

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

TITLE

"Filter for a Pair of Data Communication Lines"

FIELD OF THE INVENTION

The present invention relates to a filter for filtering data communication lines.

5                   BACKGROUND ART

Power line filters have been used to filter voltage surges from power lines. Examples of such line filters are disclosed in US patents 4,023,071 and 4,616,286. Both of these documents disclose power line filters that are designed to suppress high voltage transients in power lines. In each case, the line filter is  
10 disposed in parallel between two power lines.

Line filters similar to those disclosed in US patents 4,023,071 and 4,616,286 have been used on telephone lines to suppress high voltages and prevent damage to a telephone or a person using a telephone.

Recently, data communications technology has developed rapidly, with  
15 computer modems having considerably increased bits-per-second rates. Bits-per-second rates of 33,600 bits-per-second are common, and 57.6k bits-per-second modems are becoming increasingly popular.

The high bits-per-second throughput of such modems are placing increasingly stringent requirements on the acceptable noise levels in the data communication  
20 lines. In many instances, such high speed modems effectively communicate at a reduced throughput speed because of noise and interference on the data communication line.

Line filters previously used for power lines are applicable in preventing damage to the modem from high voltage surges, however, such devices do not assist in maximising the throughput of these high speed modems.

In addition to high voltages, high currents create distortion and jitter in the receiving circuits of a modem which can also act to decrease the effective communication speed. In addition, radio frequency (RF) noise can also have a detrimental effect on the communications speed of a modem.

The power line filters of the prior art are provided in parallel with the power lines and consequently are not readily adapted to filter RF noise and/or high currents from the data communications lines.

### SUMMARY OF THE INVENTION

In accordance with one aspect of this invention, there is provided a filter for a pair of data communication lines, said filter having an input for connection to said data communication lines and an output for connection to a communication device such as a modem or facsimile machine, the filter comprising:

first suppression means arranged to absorb voltage transients from said data communications lines provided adjacent the input;

current limiting means provided in series in each data communication line after said first suppression means;

RF filter means including an energy storage device provided after the current limiting means; and

second suppression means arranged to absorb voltage transients from said data communications lines provided after said RF filter means;

said second suppression means having a faster response time than the first suppression means.

Preferably, said filter further comprising further suppression means provided after the current limiting means and before the RF filter means, said further  
5 suppression means having a response time intermediate that of the first and second suppression means.

Preferably, the further suppression means comprises two varistors, one extending between each data communication line and an electrical earth.

Preferably, said second suppression means comprises a transient suppression  
10 diode.

Preferably, said transient suppression diode is provided between the data communication lines.

Preferably, said current limiting means comprises a PCT resistor provided in series in each data communications line.

15 Preferably, said first suppression means comprises a gas arrester.

Preferably, said gas arrester extends between each data communications line and an electrical ground.

Preferably, said energy storage device comprises at least one of an inductor and a capacitor.

20 Preferably, said RF filter means comprises an inductor provided in series in each data communications line and a capacitor provided between the data communications lines.

### BRIEF DESCRIPTION OF THE DRAWINGS

An embodiment of the present invention will now be described by way of example, with reference to the accompanying drawing in which:

Figure 1 is a circuit drawing of the embodiment.

### 5                    DETAILED DESCRIPTION OF THE EMBODIMENT

The embodiment is directed towards a filter 10 for a pair of data communication lines 12, 14 which are to be used for facsimile or data modem communications.

The line filter 10 is provided in series with the data communication lines 12 and 14. The filter 10 has an input 16 and an output 18.

- 10    The filter 10 comprises: first suppression means in the form of a gas arrester 20; current limiting means in the form of PTC (positive temperature coefficient) resistors 28 and 30; an RF filter 36 comprising inductors 38 and 40 and a capacitor 42; second suppression means in the form of a transient suppression diode 46; and further suppression means in the form of varistors 22 and 24.
- 15    The gas arrester 20 is provided at the input 16 of the line filter 10 between the lines 22 and 24. The gas arrester 20 is also connected to earth via a wire 26.

The PTC resistors 28 and 30 are provided in series in the lines 22 and 24 respectively and are positioned after the gas arrester 20.

- 20    The varistor 32 extends between the line 22 and earth via the wire 26. The varistor 34 extends between the line 24 and earth via the wire 26. The varistors 32 and 34 are positioned after the PTC resistors 28 and 30, respectively.

The inductors 38 and 40 are provided in series in the lines 22 and 24, respectively, after the varistors 32 and 34. The capacitor 42 extends between

the lines 22 and 24 and is positioned after the inductors 38 and 40. In effect, the inductors 38 and 40 and the capacitor 42 act as a low pass filter on signals present in the lines 22 and 24.

The transient suppressing diode 46 extends between the lines 22 and 24 and is  
5 provided after and in parallel with the capacitor 42.

In use, the filter 10 is positioned between the lines 22 and 24 and a device using the lines, such as a facsimile machine or data modem. The input 16 of the filter 10 is connected to the lines 22 and 24 and the output 18 is connected to the device.

10 Under normal operating conditions the signal travelling along the lines 22 and 24 is of relatively small voltage and current and has a relatively low frequency. Consequently, such a signal will not activate the gas arrester 20, the varistors 32 and 34 or the transient suppressing diode 46. Further, the signal will pass through the filter 36 without substantial attenuation because of its relatively low  
15 frequency.

Similarly, the small voltage and current of such a signal will dissipate little energy in the PTC resistors 28 and 30. The resistance of the PTC resistors 28 and 30 will therefore remain low and not attenuate the signal significantly.

Current surges in the lines 12 and 14 will be suppressed by the PTC resistors 28  
20 and 30. The increasing current will dissipate more energy in the PTC resistors 28 and 30, as a result of which the temperature and consequently the resistance of the PTC resistors 28 and 30 will increase. In turn, this acts to lower the current flowing through the resistors 28 and 30. In this manner, the filter 10 assists in reducing errors in data communication caused by current surges.

Radio frequency noise has a relatively high frequency, and consequently will be filtered by the low pass filter 36. Hence the filter 10 suppresses radio frequency noise and consequently helps reduce the error rate in communication.

High voltage surges can be very damaging to facsimile machines and data modems, which often do not have adequate surge prevention circuitry. If the voltage in the lines 22 and 24 exceeds the activation voltage of the transient suppressing diode 46, which is preferably above the voltage levels typically present in the telephone line, the transient suppressing diode 46 will activate and draw some of the power from the lines 22 and 24, thereby preventing it from damaging a device attached to the output 18. Transient suppressing diodes are typically limited in the power they can draw before being damaged, however they have a relatively fast response time and a low activation voltage compared to a gas arrester. In this regard, placing the transient suppression diode 46 after the filter 36 is advantageous, since the inductors 38 and 40 and the capacitor 42 will store some of the power in the lines 22 and 24, thereby reducing the power that would be absorbed by the transient suppressing diode 46 during the voltage transient. After the voltage transient ends, the energy stored in the inductors 38 and 40 and the capacitor 42 will be released and absorbed by the transient suppressing diode 46.

As the voltage in the lines 22 and 24 continues to rise, the varistors 32 and 34 will activate, drawing still more power from the lines 22 and 24. As power is drawn from the lines 22 and 24 by the varistors 32 and 34, power is also dissipated in the PCT resistors 28 and 30. As power is dissipated in the PCT resistors 28 and 30, their positive temperature co-efficient causes their resistance to increase. The PCT resistors 28 and 30 act to dissipate excess power from the lines 22 and 24 respectively and also provide protection for the varistors 32 and 34 from overloading.

As the voltage in the lines 22 and 24 continues to rise further, the activation voltage of the gas arrester 20 will be exceeded and the gas arrester 20 will



activate. Once activated the gas arrester 20 effectively acts as a short circuit between the lines 22 and 24 and earth, preventing the high voltage transient from reaching the device attached to the output 18. The gas arrester 20 has a high power capacity, allowing it to draw high voltages without damage.

- 5 For the purposes of comparison, the response time of a transient suppression diode 46 is typically in the region of 1ps, for a varistor the response time is typically 1 $\mu$ s, and for a gas arrester the response time is typically 1ms or so. The use of a three-stage activation for suppressing voltage transients allows a fast response time whilst avoiding damage to the suppression devices used.
- 10 Placing the transient suppression diode 46 after the filter 36 provides additional protection for the diode 46 because of the power storage properties of the inductors 38 and 40 and the capacitor 42, as described above.

- Thus, the filter 10 of the embodiment provides protection against voltage surges and assists in increasing the data communication rate by filtering RF noise and
- 15 limiting current surges.

CLAIMS

1. A filter for a pair of data communication lines, said filter having an input for connection to said data communication lines and an output for connection to a communication device such as a modem or facsimile machine, the filter comprising:
- 5       first suppression means arranged to absorb voltage transients from said data communications lines provided adjacent the input;
- current limiting means provided in series in each data communication line after said first suppression means;
- 10       RF filter means including an energy storage device provided after the current limiting means; and
- second suppression means arranged to absorb voltage transients from said data communications lines provided after said RF filter means;
- said second suppression means having a faster response time than the
- 15       first suppression means.
2. A filter as claimed in claim 1, further comprising further suppression means provided after the current limiting means and before the RF filter means, said further suppression means having a response time intermediate that of the first and second suppression means.
- 20 3. A filter as claimed in claim 1 or 2, wherein the further suppression means comprises two varistors, one extending between each data communication line and an electrical earth.

4. A filter as claimed in any one of the preceding claims, wherein said second suppression means comprises a transient suppression diode.
5. A filter as claimed in claim 4, wherein said transient suppression diode is provided between the data communication lines.
- 5 6. A filter as claimed in any one of the preceding claims, wherein said current limiting means comprises a PCT resistor provided in series in each data communications line.
7. A filter as claimed in any one of the preceding claims, wherein said first suppression means comprises a gas arrester.
- 10 8. A filter as claimed in claim 7, wherein said gas arrester extends between each data communications line and an electrical ground.
9. A filter as claimed in any one of the preceding claims, wherein said energy storage device comprises at least one of an inductor and a capacitor.
10. A filter as claimed in claim 9, wherein said RF filter means comprises an  
15 inductor provided in series in each data communications line and a capacitor provided between the data communications lines.

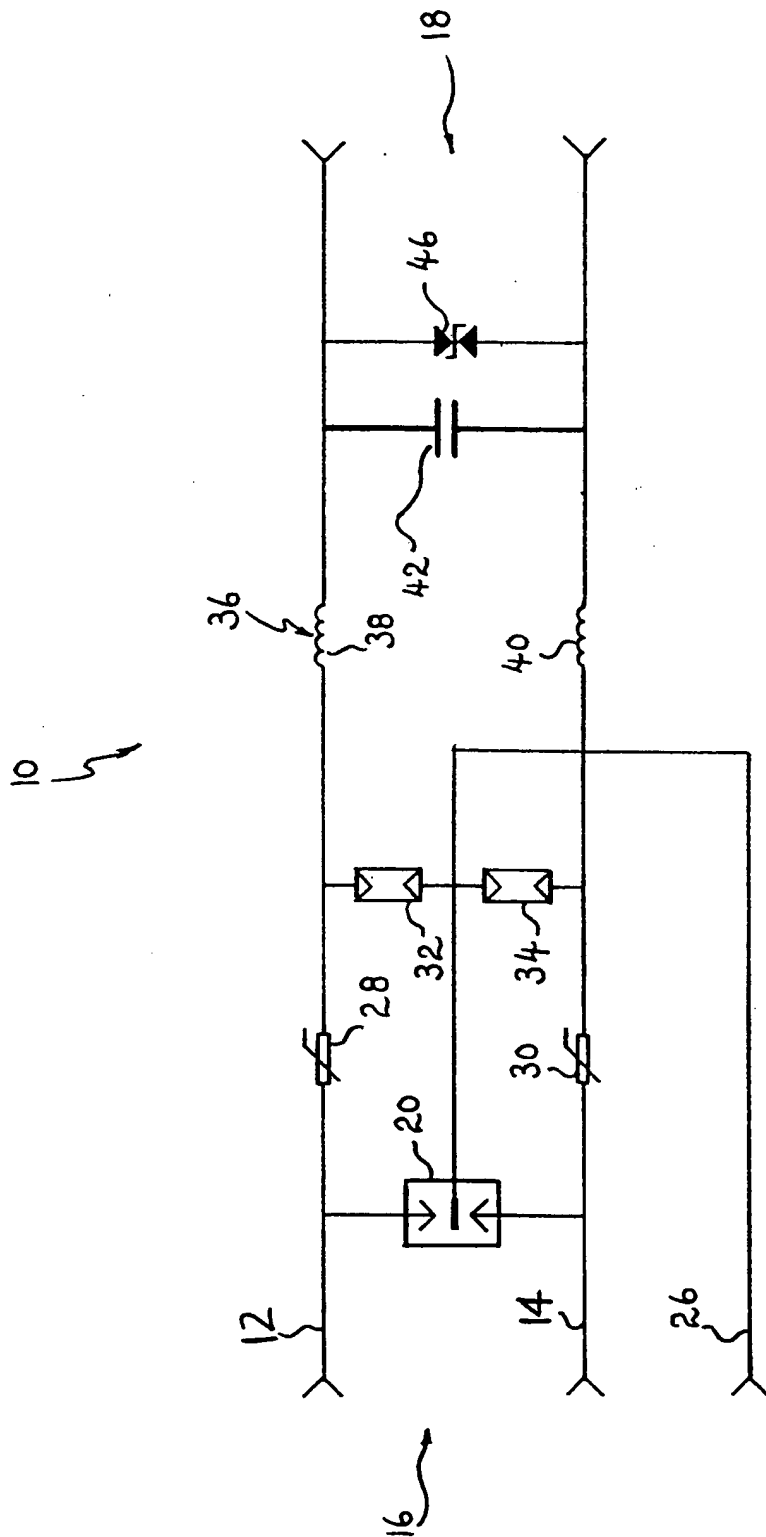


Fig. 1

**INTERNATIONAL SEARCH REPORT**International Application No.  
**PCT/AU 98/00405**

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>																						
Int Cl <sup>6</sup> : H02H 9/04; H04B 15/00																						
According to International Patent Classification (IPC) or to both national classification and IPC																						
<b>B. FIELDS SEARCHED</b>																						
Minimum documentation searched (classification system followed by classification symbols) IPC: H02H 9/04, 9/02, 3/20; H04B 15/00; H03H 5/1C; H03H 7/1C																						
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU: IPC as above																						
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPAT : (Power()line # or Communicat(): Line#) AND (Transient# or surg: or Limit: or Distort: or Jitter: or Noise) AND Filter: JAPIO : as above																						
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>																						
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																				
A	US 4023071 A (FUSSELL) 10 May 1977 Column 2 line 11-column 3 line 30	1-10																				
A	US 4342013 A (KALLMAN) 27 July 1982 Figure 1; abstract	1-10																				
A	GB 2164813 A (SHARP KABUSHIKI KAISHA) 26 March 1986 Figure 1; abstract	1-10																				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex																						
<p>* Special categories of cited documents:</p> <table border="0"><tr><td>"A"</td><td>document defining the general state of the art which is not considered to be of particular relevance</td><td>"T"</td><td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td></tr><tr><td>"E"</td><td>earlier document but published on or after the international filing date</td><td>"X"</td><td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td></tr><tr><td>"L"</td><td>document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td><td>"Y"</td><td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td></tr><tr><td>"O"</td><td>document referring to an oral disclosure, use, exhibition or other means</td><td>"&amp;"</td><td>document member of the same patent family</td></tr><tr><td>"P"</td><td>document published prior to the international filing date but later than the priority date claimed</td><td></td><td></td></tr></table>			"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E"	earlier document but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family	"P"	document published prior to the international filing date but later than the priority date claimed		
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																			
"E"	earlier document but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																			
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																			
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family																			
"P"	document published prior to the international filing date but later than the priority date claimed																					
Date of the actual completion of the international search 3 July 1998		Date of mailing of the international search report <b>20 JUL 1998</b>																				
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (02) 6285 3929		Authorized officer  <b>JUZER KHANBHAI</b> Telephone No.: (02) 6283 2176																				

**INTERNATIONAL SEARCH REPORT**

International Application No.

**PCT/AU 98/00405**

<b>C (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
<b>Category*</b>	<b>Citation of document, with indication, where appropriate, of the relevant passages</b>	<b>Relevant to claim No.</b>
A	US 4616286 A (BREECE) 7 October 1986 Column 2 line 5-line 54	1-10
A	US 4628394 A (CROSBY et al) 9 December 1986 Figure 1; column 1 line 24-column 2 line 23	1-10
A	US 5500629 A (MEYER) 19 March 1996 Figure 7; column 7 lines 46-column 8 line 22	1-10

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International Application No.  
**PCT/AU 98/00405**

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member			
US	4023071	NONE				
US	4342013	NONE				
GB	2164813	DE	3533489	JP	61077409	US 4760231
US	4616286	NONE				
US	4628394	US	4584622			
US	5500629	CA	2170784	DE	19608219	GB 2299892
		JP	8321420			
						END OF ANNEX